




ASTRONERGY

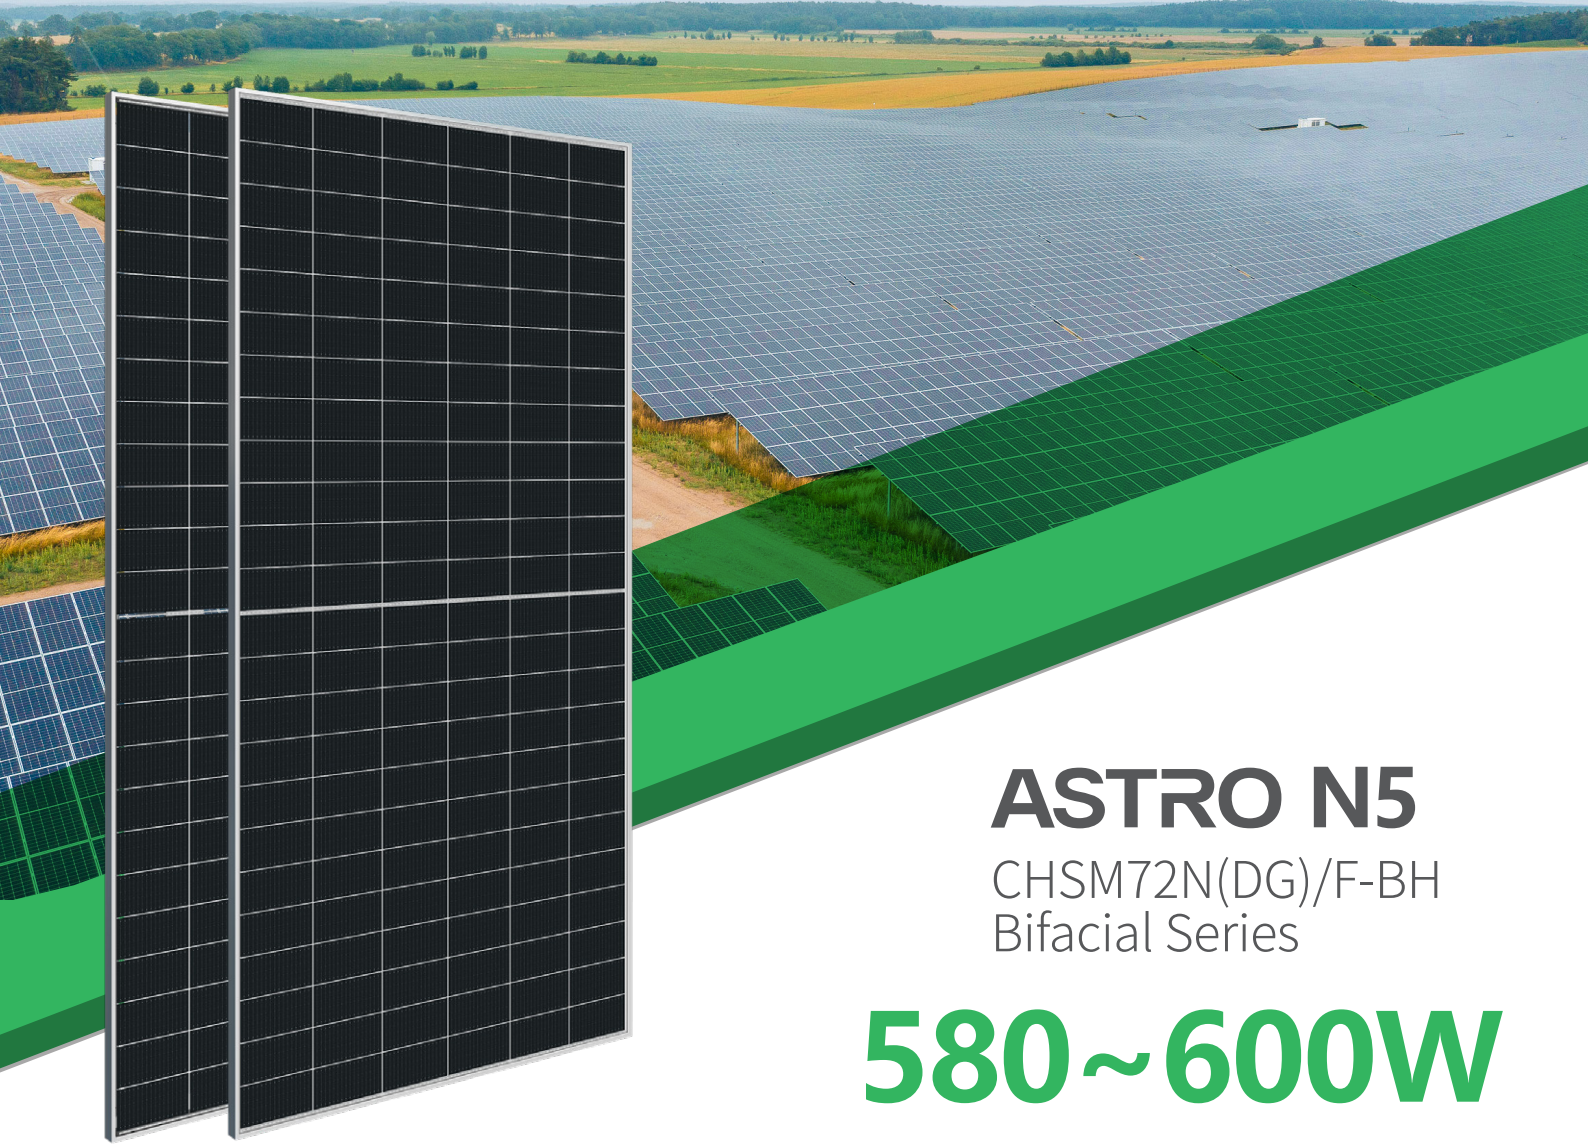

# ASTRO N5

CHSM72N(DG)/F-BH  
Bifacial Series


# 580~600W



## Warranty

**15** 15-year Product Warranty

**30** 30-year Linear Power Warranty

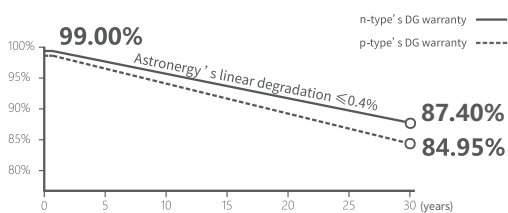

### n-type TOPCon 4.0

Novel upgrade, enhancing module efficiency



### SMBB Design

Enhancing current collection, minimizing power loss



### Better Temperature Coefficient

≤ -0.29%/°C, adapting for high temperature



### Bifacial Power Generation

Maximizing bifaciality, boosting backside power output



IEC 61215, IEC 61730  
ISO 9001:2015:ISO Quality Management System  
ISO 14001:2015:ISO Environment Management System  
ISO 45001:Occupational Health and Safety  
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1  
BloombergNEF



**580~600W**

POWER RANGE

**0~+3%**


POWER SORTING

**23.2%**MAX MODULE  
EFFICIENCY**≤ 1.0%**FIRST YEAR  
POWER DEGRADATION**≤ 0.4%**YEAR 2-30  
POWER DEGRADATION

## Mechanical Specifications

Outer dimensions (L x W x H)	2278 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	144 (6*24)
Frame technology	Aluminum, silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Portrait: (+)350 mm, (-)250 mm; Customized length
Cable diameter (IEC/UL)	4 mm <sup>2</sup> / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 (Standard) / MC4-EVO2A (Optional)
Module weight	32.1 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1207 kg
Modules per 40' HQ container	720 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.  
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

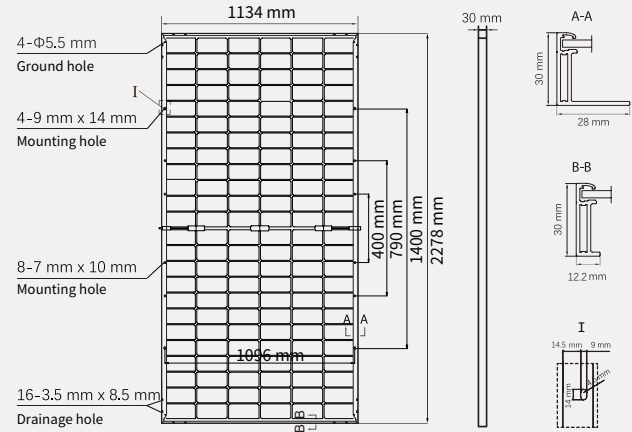

## Electrical Specifications

**STC:** Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25° C, AM=1.5

	580	585	590	595	600
Rated output (Pmpp / Wp)	580	585	590	595	600
Rated voltage (Vmpp / V)	43.11	43.27	43.45	43.61	43.78
Rated current (Impp / A)	13.45	13.52	13.58	13.64	13.70
Open circuit voltage (Voc / V)	51.30	51.50	51.70	51.90	52.10
Short circuit current (Isc / A)	14.28	14.36	14.45	14.53	14.61
Module efficiency	22.5%	22.6%	22.8%	23.0%	23.2%

**NMOT:** Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20° C, AM=1.5, Wind Speed 1m/s

	436.2	439.9	443.7	447.4	451.2
Rated output (Pmpp / Wp)	436.2	439.9	443.7	447.4	451.2
Rated voltage (Vmpp / V)	40.59	40.73	40.89	41.06	41.21
Rated current (Impp / A)	10.75	10.80	10.85	10.90	10.95
Open circuit voltage (Voc / V)	48.73	48.92	49.11	49.30	49.49
Short circuit current (Isc / A)	11.53	11.59	11.66	11.73	11.80

## Electrical Specifications (Integrated power)

Pmpp gain	Pmpp / Wp	Vmpp / V	Impp / A	Voc / V	Isc / A
5%	620	43.45	14.26	51.70	15.17
10%	649	43.45	14.94	51.70	15.89
15%	679	43.46	15.62	51.71	16.61
20%	708	43.46	16.30	51.71	17.33
25%	738	43.46	16.98	51.71	18.06

Electrical characteristics with different rear power gain (reference to 590W)

## Temperature Ratings (STC)

Temperature coefficient (Pmpp)	-0.29%/°C	No. of diodes	3
Temperature coefficient (Isc)	+0.043%/°C	Junction box IP rating	IP 68
Temperature coefficient (Voc)	-0.25%/°C	Max. series fuse rating	30 A
Nominal module operating temperature (NMOT)	41±2°C	Max. system voltage (IEC/UL)	1500V <sub>DC</sub>

## Operating Parameters

## Curve

